Product Data

Industrial Coating for Protection of Equipment Operating at Elevated Temperatures

Belzona® 1391 (Ceramic HT) is a two component high temperature coating system designed to operate under continuous immersion of up to 120°C (248°F). This Belzona® produce provides excellent erosion-corrosion resistance at elevated temperatures.

Belzona® 1391 (Ceramic HT) will:


- · Extend equipment life
- · Cut downtime
- · Protect against erosion-corrosion

Belzona® 1391 (Ceramic HT) can also be used as a high strength structural adhesive for bonding and for creating irregular load bearing shims.



Scrubber Units

Separators

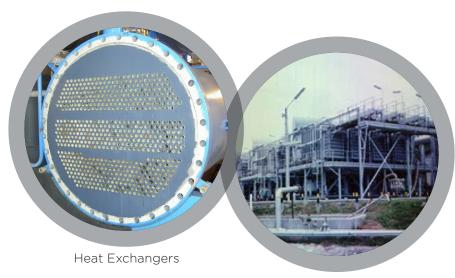

Distillation Units

Applications for Belzona® 1391 (Ceramic HT) include:

- Oil production separators
- Condensate extraction pumps
- Calorifiers
- Evaporators
- Autoclaves
- Scrubber units
- Heat exchangers
- Condensate return tanks
- · Distillation units
- Absorber towers





Belzona® 1391 (Ceramic HT) is:

Simple

- · Easily mixed and applied
- Cures at ambient temperatures
- One or two coat system available

Safe

- Cold temperature cure ensures no fire risk
- Solvent free
- Suitable for contact with hot (85°C/185°F) potable water
- Good electrical insulation characteristics

Versatile

- Bonds strongly to most rigid substrates
- High adhesion maintained over full service temperature range

Effective

- Will outperform conventional VEGF coatings in terms of mechanical strength and adhesion together with reduced shrinkage and VOC emissions
- Unique post curing mechanism activated by elevated temperatures up to 120°C (248°F)
- Resistant to steam out process
- Excellent chemical resistance

Belzona® 1391

Ceramic HT



Absorber Towers

For more information, please contact your local Belzona® representative:

QUALITY PRODUCTS - TECHNICAL SUPPORT

The Belzona® product range is manufactured through stringent quality and environmental control guidelines complying with the internationally recognised requirements of **ISO 9001:2008** and **ISO 14001:2004**.

Belzona® has a global distribution network of over 140 Distributors operating in 120 countries. Local support is provided by a trained Technical Consultant who will diagnose the problem, recommend the solution and provide 24 hour on-site application supervision and advice.



Belzona products are manufactured under an

